



Sictra

TFC 2|40-150 | 19

Twin intermediate wire drawing line
for plain and tinned copper wire.



Twin intermediate wire drawing line for plain and tinned copper wire


| Ligne bifilaire de tréfilage intermédiaire pour fil en cuivre rouge et étamé

| Zweidraht -Mittelzuganlage für blanke und verzinnnte Cu-Drähte

| Línea de trefilado intermedia bifilar para alambres de cobre y cobre estañado

| Linea di trafilatura intermedia bifilare per fili di rame rosso e stagnato

TFC 2/40-150/19

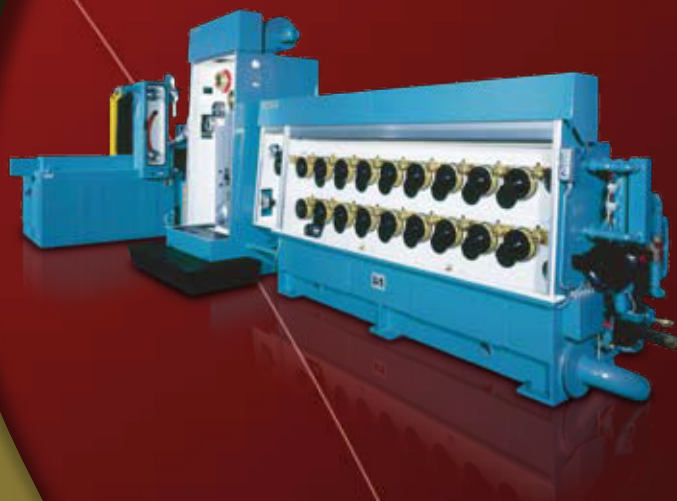

SICTRA

**Twin intermediate wire drawing line
for plain and tinned copper wire**

Twin intermediate wire drawing line for plain and tinned copper wire

- | Ligne bifilaire de tréfilage intermédiaire pour fil en cuivre rouge et étamé
- | Zweidraht - Mittelzuganlage für blanke und verzinnnte Cu-Drähte
- | Línea de trefilado intermedia bifilar para alambres de cobre y cobre estañado
- | Linea di trafilatura intermedia bifilare per fili di rame rosso e stagnato





BO 63-80

- | Dynamic spooler
- | Enrouleur dynamique
- | Dynamischer Spuler
- | Bobinador dinámico
- | Bobinatore dinamico

Twin intermediate wire drawing line for plain and tinned copper wire			Ligne bifilaire de tréfilage intermédiaire pour fil en cuivre rouge et étamé			Zweidraht - Mittelzuganlage für blanken und verzinneten Cu-Drähte			Línea de trefilado intermedia bifilar para alambres de cobre y cobre estañado			Linea di trafilatura intermedia bifilare per fili di rame rosso e stagnato		
Technical data			Données techniques			Technische Daten			Datos técnicos			Dati tecnici		
Inlet dia.	1 wire 4,00 mm 2 wires 3,50 mm		Dia. d'entrée	1 fil 4,00 mm 2 fils 3,50 mm		Einlaufdurchmesser	1 Draht 4,00 mm 2 Drähte 3,50 mm		Diá. de entrada	1 hilo 4,00 mm 2 hilos 3,50 mm		Diametro di entrata	1 filo 4,00 mm 2 fili 3,50 mm	
Outlet dia.	1 wire 1,50 mm 2 wires Min 0,40 mm Max 1,20 mm		Dia. de sortie	1 fil 1,50 mm 2 fils Min 0,40 mm Maxi 1,20 mm		Fertigdurchmesser	1 Draht 1,50 mm 2 Drähte Min 0,40 mm Max 1,20 mm		Diá. de salida	1 hilo 1,50 mm 2 hilos Min 0,40 mm Máx 1,20 mm		Diametro di uscita	1 filo 1,50 mm 2 fili Min 0,40 mm Max 1,20 mm	
No. of dies	2 x 19		Nombre de filières	2 x 19		Zügezahl	2 x 19		Número hileras	2 x 19		Numero dei passi	2 x 19	
Elongation per die	24% or 26%		Allongement par filière	24% ou 26%		Verlängerung pro Zug	24% oder 26%		Alargamiento para hilera	24% o 26%		Allungamento per filiera	24% o 26%	
Speed	40 MPS		Vitesse	40 MPS		Ziehgeschwindigkeit	40 MPS		Velocidad	40 MPS		Velocità	40 MPS	
Transmission	Gear		Transmission	Engrenages		Kraftübertragung	Durchspiralverzahnte schrägverzahnte, gehärtete und geschliffene Zahnräder		Transmisión	Engranajes		Trasmissione	Ad ingranaggi	
Available in two versions	A - with one motor without by-pass system B - with two motors and by-pass system		Disponible en deux versions	A - avec un seul moteur sans saute-passes B - avec deux moteurs et saute-passes		Verfügbar in zwei Versionen	A - mit einem einzigen Motor und ohne Schnellwechselsystem B - mit zwei Motoren und mit Ziehstein-Schnellwechselsystem		Disponible en dos versiones	A - con un solo motor sin salto pasos B - con dos motores y salto pasos		Disponibile in due versioni	A - con motore senza salto passi B - con due motori e salto passi	
Annealer		RC 2/280	Recuiseur		RC 2/280	Durchlaufglühe		RC 2/280	Recocedor		RC 2/280	Ricottore		RC 2/280
Spoolers			Enrouleurs			Spuler			Bobinadores			Bobinatori		
Spools dia.	630 800 1000 mm (dynamic)		Dia. bobines	630 800 1000 mm (dynamique)		Spulendurchm.	630 800 1000 mm (dynamisch)		Bobinas diá.	630 800 1000 mm (dinámico)		Bobine dia.	630 800 1000 mm (dinamico)	
	630 800 1000 mm (static)			630 800 1000 mm (statique)			630 800 1000 mm (statik)			630 800 1000 mm (estático)			630 800 1000 mm (statico)	
	630 800 mm (automatic)			630 800 mm (automatique)			630 800 mm (automatisch)			630 800 mm (automático)			630 800 mm (automatico)	



Trafco



Cortinovis



Sictra

TCS

MACHINERY & SERVICES

TCS Machinery & Service S.r.l.

Strada Torino, 20 10080 Rivara C.Se (TO) Italy

Tel. +39 0124 48827 FAX +39 0124 48700

Mail: info@tcsmachinery.com

WEB: www.tcsmachinery.com